

# J-Guide/T-Bar Double Purchase Arbors

- Used in J-Guide/T-Bar guided systems to hold counterweight that balances the batten load.
- Arbor tops are fabricated from 1/2" (12.6 mm) steel, and contain an 8-1/2" (216 mm) diameter ASTM A48 grey iron sheave with equal pitch diameter rope and cable grooves, tapered roller bearings, and 7 gauge (4.55 mm) side plates.
- Arbor bottoms contain an 8" (203 mm) diameter ASTM A48 grey iron sheave grooved for 3/4" (19 mm) rope, with sealed precision ball bearings and 10 gauge (3.4 mm) side plates.
- Two 3/4" (19 mm) steel arbor rods have three nuts at top and bottom.
- Each rod has a retaining collar with a thumbscrew incorporating an easy-to-grip plastic knob.
- Front collar is welded to top spreader plate for additional security.
- 12 gauge (2.65 mm) steel spreader plate every 2' (0.6 m) (minimum 2). Labels on the back bar show safety information and proper location for spreader plates.
- 3/8" x 3" (9.5 mm x 76.2 mm) steel back bar, with two guide assemblies.
- Standard polypropylene guide shoes allow for on site adjustment for 6" (154 mm) or 8" (203 mm) set centers; other shoe types and centers are available.
- Arbors are provided with easy-to-read, self-adhesive set numbers.

## Order Information

Number	Length*	Capacity+ 4" (102 mm) Weights	Capacity+ 6" (152 mm) Weights	Weight
<b>J-Guide/T-Bar Counterweight Arbor, 6 Line Double Purchase—615 Series</b>				
008-615X06	6' (1.8 m)	841 lbs. (381 kg)	1303 lbs. (473 kg)	113 lbs. (51.2 kg)
008-615X07	7' (2.13 m)	1009 lbs. (458 kg)	1564 lbs. (709 kg)	113 lbs. (51.2 kg)
008-615X08	8' (2.4 m)	1177 lbs. (534 kg)	1825 lbs. (828 kg)	113 lbs. (51.2 kg)
008-615X09	9' (2.75 m)	1345 lbs. (610 kg)	2086 lbs. (946 kg)	113 lbs. (51.2 kg)
008-615X10	10' (3 m)	1514 lbs. (687 kg)	2346 lbs. (1069 kg)	113 lbs. (51.2 kg)
008-615X11	11' (3.35 m)	1682 lbs. (763 kg)	2607 lbs. (1182 kg)	113 lbs. (51.2 kg)
008-615X12	12' (3.65 m)	1850 lbs. (839 kg)	2868 lbs. (1301 kg)	113 lbs. (51.2 kg)
008-615X13	13' (3.9 m)	2018 lbs. (915 kg)	3129 lbs. (1491 kg)	113 lbs. (51.2 kg)
*Overall length is 22-3/8" (568.3 mm) longer than the nominal length. +Average Capacity using J.R. Clancy steel counterweights.				
<b>RWL:</b> RWL is maximum load that can be applied to the arbor which is in "like new" condition and has been properly installed, maintained, and operated.				



J-Guide/T-Bar Arbor  
Double Purchase  
008-615X04

Number	Length*	Capacity+ 4" (102 mm) Weights	Capacity+ 6" (152 mm) Weights	Weight
<b>J-Guide/T-Bar Counterweight Arbor, 8 Line Double Purchase—815 Series</b>				
008-815X06	6' (1.8 m)	841 lbs. (381 kg)	1303 lbs. (473 kg)	119 lbs. (54 kg)
008-815X07	7' (2.13 m)	1009 lbs. (458 kg)	1564 lbs. (709 kg)	126 lbs. (57.2 kg)
008-815X08	8' (2.4 m)	1177 lbs. (534 kg)	1825 lbs. (828 kg)	133 lbs. (60.3 kg)
008-815X09	9' (2.75 m)	1345 lbs. (610 kg)	2086 lbs. (946 kg)	140 lbs. (63.5 kg)
008-815X10	10' (3 m)	1514 lbs. (687 kg)	2346 lbs. (1069 kg)	147 lbs. (66.7 kg)
008-815X11	11' (3.35 m)	1682 lbs. (763 kg)	2607 lbs. (1182 kg)	154 lbs. (69.85 kg)
008-815X12	12' (3.65 m)	1850 lbs. (839 kg)	2868 lbs. (1301 kg)	161 lbs. (73 kg)
008-815X13	13' (3.9 m)	2018 lbs. (915 kg)	3129 lbs. (1491 kg)	169 lbs. (76.7 kg)
*Overall length is 22-3/8" (568.3 mm) longer than the nominal length. +Average Capacity using J.R. Clancy steel counterweights.				
<b>RWL:</b> RWL is maximum load that can be applied to the arbor which is in "like new" condition and has been properly installed, maintained, and operated.				


## Options

Number	Description	Weight
048-3/4EN	3/4" (19 mm) Eye Nut	2 lbs (0.9 kg)



Eye Nut  
048-3/4EN

## Dimensions

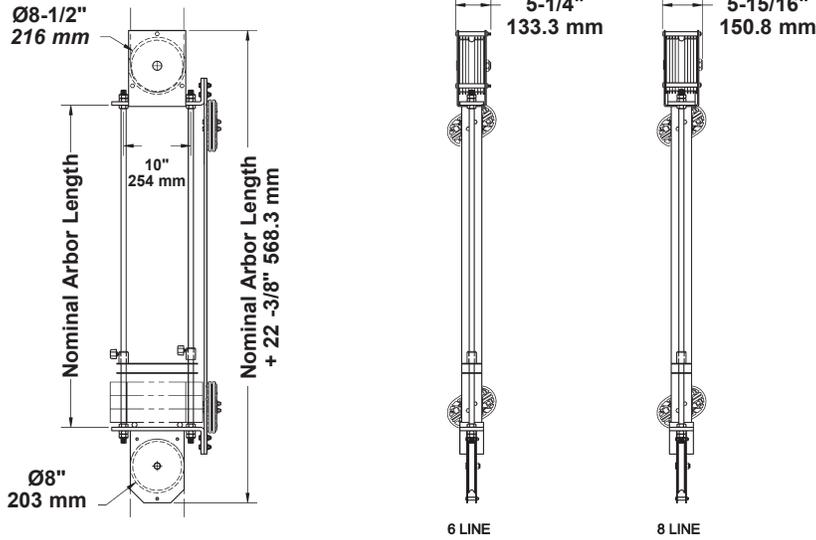

**Wenger**

**GEARBOSS**

**JRCLANCY**  
QUALITY SINCE 1988

© 2016 Wenger Corporation  
USA/07-16/W



### Design, Manufacture and Installation of Theatrical Equipment Worldwide

For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.

**WENGER CORPORATION**

Phone 800.4WENGER (493-6437) Worldwide 1.507.455.4100 | Fax 507.455.4258 Worldwide 1.507.774.8576  
Parts & Service 800.887.7145 | Canada Office 800.268.0148 | Web wengercorp.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

**GEARBOSS**

Phone 800.493.6437 | email gearboss@wengercorp.com | Web gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

**JR CLANCY**

Phone 800-836-1885 Worldwide 1.315.451.3440 | Fax 877.836.1885 Worldwide 1.315.451.1766 | Web jrclancy.com  
7041 Interstate Island Road | Syracuse | NY 13209-9713