


Adjustable Combination Floor Blocks

- Used with individual wire-guided, J-Guide, or T-Bar sets.
- Rope lock (010-533R) and floor block in a single unit.
- ASTM Class 30 grey iron sheave, grooved for 3/4" (19 mm) rope.
- Sealed precision ball bearings.
- Incorporates tie off points for guide wires.
- Sheave position may be adjusted to properly tension the hand line.

Dimensions

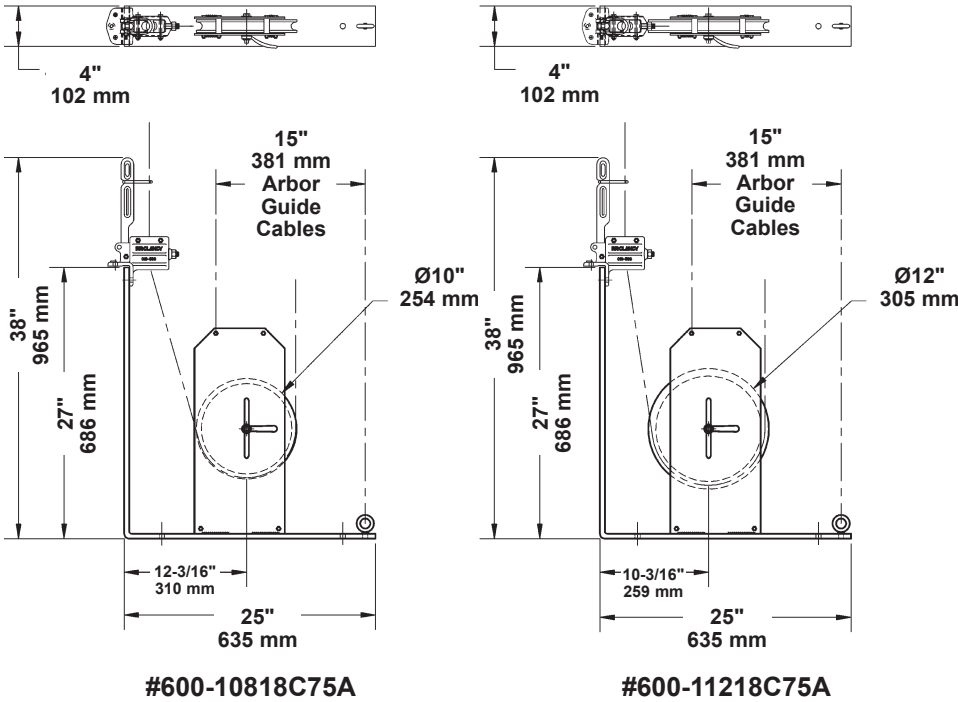

Adjustable Combination Floor Block
600-10818C75A

Order Information

| Number | Description | Weight |
|---------------|--------------|-------------------|
| 600-10818C75A | 10" (254 mm) | 71 lbs. (32.2 kg) |
| 600-11218C75A | 12" (305 mm) | 80 lbs. (36.3 kg) |



Design, Manufacture and Installation of Theatrical Equipment Worldwide

For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.



© 2016 Wenger Corporation
USA/07-16/W



WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide 1.507.455.4100 | Fax 507.455.4258 Worldwide 1.507.774.8576
Parts & Service 800.887.7145 | Canada Office 800.268.0148 | Web wengercorp.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

GEARBOSS

Phone 800.493.6437 | email gearboss@wengercorp.com | Web gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

JR CLANCY

Phone 800-836-1885 Worldwide 1.315.451.3440 | Fax 877.836.1885 Worldwide 1.315.451.1766 | Web jrclancy.com
7041 Interstate Island Road | Syracuse | NY 13209-9713