

AlphaChain™

AlphaChain™

- 7 mm (0.275") black alloy chain for rigging.
- Black chain eliminates glare and reflection.
- Grade 63 hardened alloy chain meeting OSHA requirements for sling usage OSHA 1910.184(e)(5).
- Used with standard 1/4" (6.35 mm) hardware.
- Marked with JRC on every link.
- Date code on every 10th link for traceability.
- 3,250 lb. (1,474 kg) working loading limit based on the manufacturer's 4:1 safety factor.





AlphaChain
022-250TC

AlphaChain Trim Chains

- Most popular and economical lift line termination.
- 36" (914 mm) long, 7 mm (0.275") Grade 63 alloy chain, with a forged round pin anchor shackle, and thimble.
- The chain is wrapped one and one half turns around the batten and attached back to the thimble at the end of the lift line with a forged shackle. Adjustment is made by connecting the shackle into a link along the return side of the chain.

Dimensions

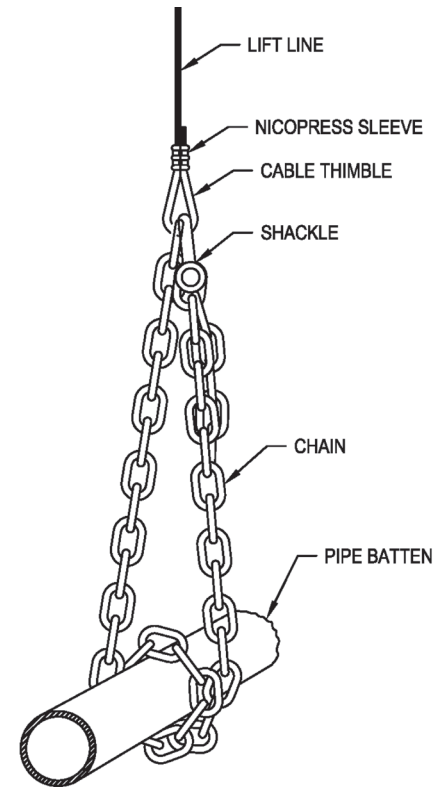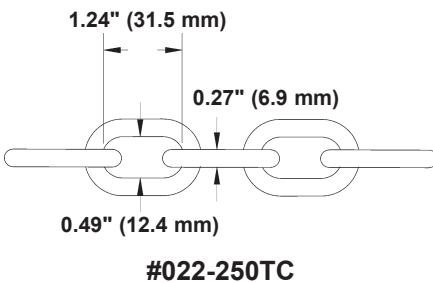

AlphaChain Trim Chain
015-1192B

Order Information

Number	Description	RWL	Weight
022-250TC	AlphaChain 7 mm (0.275") Grade 63 Alloy Chain	3250 lbs. (1474 kg)	0.7 lbs. (0.32 kg)
015-1191B	AlphaChain Black Trim Chain with 5/16" (7.9 mm) Shackle, 1/4" (6.35 mm) Thimble	3250 lbs. (1474 kg)	2 lbs. (0.9 kg)
015-1192B	AlphaChain Black Trim Chain with 1/4" (6.35 mm) Shackle, 1/4" (6.35 mm) Thimble	3250 lbs. (1474 kg)	2 lbs. (0.9 kg)
11-518D8	AlphaChain Black Trim Chain with 1/4" (6.35 mm) Shackle, 3/16" (4.76 mm) Thimble	3250 lbs. (1474 kg)	2 lbs. (0.9 kg)

RWL: RWL is maximum load that can be applied to the trim chain which is in "like new" condition and has been properly installed, maintained, and operated.



Design, Manufacture and Installation of Theatrical Equipment Worldwide

For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.



© 2016 Wenger Corporation
USA/11-16/W

