


Mule Blocks - 12 Series, 8" (203 mm) Blocks

- Used to divert the cables around obstructions or change direction of travel.
- ASTM Class 30 grey iron sheave.
- Sealed precision ball bearings or tapered roller bearings.
- 7 gauge (4.55 mm) side plates fully enclose sheave.
- 3 gauge (6 mm) formed channel base.
- Four spacers between the side plates prevent cables from escaping the sheave grooves.
- **Mule blocks must be welded in place after final alignment** – consult the factory for specific information.

Dimensions

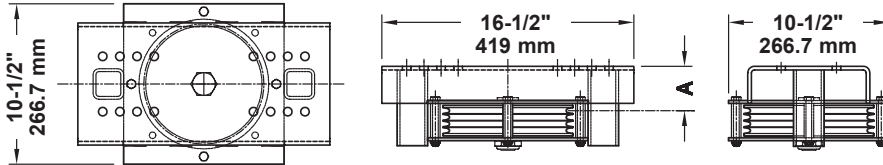

Design, Manufacture and Installation of Theatrical Equipment Worldwide
For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.

Order Information

| Number | Grooving | RWL Per Line | Max Total RWL 180° | Max Total RWL 90° | Height | "A" |
|--|----------------------------|-------------------|--------------------|--------------------|--------------------|--------------------|
| 8" (203 mm) Mule Blocks—Cast Iron Sheave w/ Ball Bearings | | | | | | |
| 500-10812C25 | (1) 1/4" Cable (6.35 mm) | 500 lbs. (227 kg) | 500 lbs. (227 kg) | 500 lbs. (227 kg) | 4-1/16" (103.2 mm) | 3-1/16" (77.8 mm) |
| 500-20812C19 | (2) 3/16" Cables (6.35 mm) | 400 lbs. (181 kg) | 800 lbs. (363 kg) | 800 lbs. (363 kg) | 4-1/16" (103.2 mm) | - |
| 500-20812C25 | (2) 1/4" Cables (6.35 mm) | 500 lbs. (227 kg) | 1000 lbs. (453 kg) | 1000 lbs. (453 kg) | 4-1/16" (103.2 mm) | - |
| 8" (203 mm) Mule Blocks—Cast Iron Sheave w/ Tapered Roller Bearings | | | | | | |
| 500-10812C25T | (1) 1/4" Cable (6.35 mm) | 500 lbs. (227 kg) | 500 lbs. (227 kg) | 500 lbs. (227 kg) | 4-1/16" (103.2 mm) | 3-1/16" (77.8 mm) |
| 500-20812C19T | (2) 3/16" Cables (4.76 mm) | 400 lbs. (181 kg) | 800 lbs. (363 kg) | 800 lbs. (363 kg) | 4-1/16" (103.2 mm) | - |
| 500-20812C25T | (2) 1/4" Cables (6.35 mm) | 500 lbs. (227 kg) | 1000 lbs. (453 kg) | 1000 lbs. (453 kg) | 4-1/16" (103.2 mm) | - |
| 500-40812C19 | (4) 3/16" Cables (4.76 mm) | 400 lbs. (181 kg) | 1400 lbs. (635 kg) | 1600 lbs. (726 kg) | 5-1/4" (133.3 mm) | 2-15/16" (74.6 mm) |
| 500-40812C25 | (4) 1/4" Cables (6.35 mm) | 500 lbs. (227 kg) | 1400 lbs. (635 kg) | 2000 lbs. (907 kg) | 5-1/4" (133.3 mm) | 2-15/16" (74.6 mm) |
| 500-80812C19 | (8) 3/16" Cables (4.76 mm) | 700 lbs. (317 kg) | 1400 lbs. (635 kg) | 2000 lbs. (907 kg) | 6-13/16" (173 mm) | - |
| 500-80812C25 | (8) 1/4" Cables (6.35 mm) | 500 lbs. (227 kg) | 1400 lbs. (635 kg) | 2000 lbs. (907 kg) | 6-13/16" (173 mm) | - |

Dimension "A" is from the base to the center of the first block groove.

RWL: RWL is maximum load that can be applied to a block which is in "like new" condition and has been properly installed, maintained, and operated.



© 2016 Wenger Corporation
USA/07-16/W



WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide 1.507.455.4100 | Fax 507.455.4258 Worldwide 1.507.774.8576
 Parts & Service 800.887.7145 | Canada Office 800.268.0148 | Web wengercorp.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

GEARBOSS

Phone 800.493.6437 | email gearboss@wengercorp.com | Web gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

JR CLANCY

Phone 800-836-1885 Worldwide 1.315.451.3440 | Fax 877.836.1885 Worldwide 1.315.451.1766 | Web jrclancy.com
 7041 Interstate Island Road | Syracuse | NY 13209-9713