

SureLock®

- Will not open if the set is more than 50 lbs. (22.6 kg) out of balance, reducing the risk of rigging “runaways”.
- Indicates if the set is balanced, batten heavy, or arbor heavy.
- One piece ASTM A536 ductile iron body.
- 10” (254 mm) handle, powder-coated ductile iron, contoured for comfort and ease of use.
- Two iron cams grip rope with socket head adjustment screw for 5/8”–1” (15.875–25.4 mm) rope. Adjustment screw has a nylon tip for quiet operation.
- Integral ears for optional padlock.
- Vinyl coated steel oval locking ring.
- May be used on 6” (152 mm) centers or more.
- For use in new projects or as an upgrade to existing rigging systems.
- Rubber bumper to quiet handle when it is opened.


Please Note:

Rope locks are not designed to hold an imbalance of more than 50 lbs. (22.6 kg), nor to be used as a speed control.



**SureLock
010-600R
US Patent 7,165,295**

Dimensions

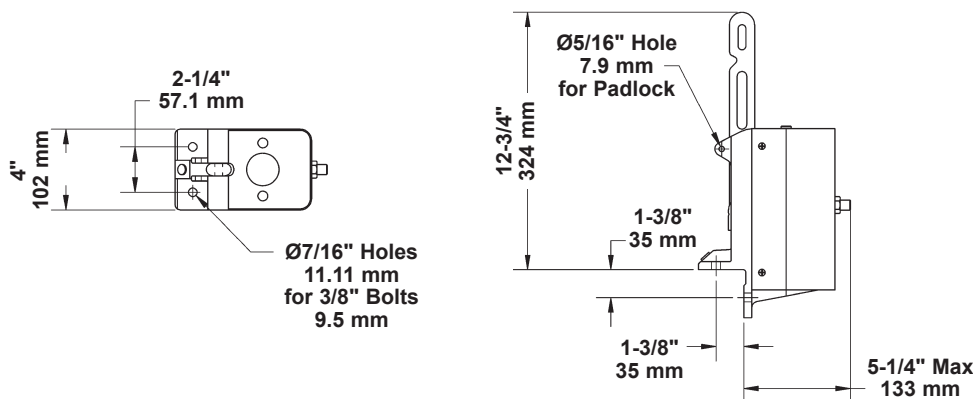

Order Information

Number	Description	RWL	Weight
010-600R	SureLock	50 lbs. (22.6 kg)	20 lbs. (3.6 kg)
010-PLOCK	Padlock for Rope Lock	–	1 lb. (0.45 kg)
010-533C	Replacement Oval Ring, Vinyl Coated	–	0.1 lb. (0.04 kg)

RWL: RWL is maximum load that can be applied to the rope lock which is in “like new” condition and has been properly installed, maintained, and operated.



Design, Manufacture and Installation of Theatrical Equipment Worldwide

For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.



© 2016 Wenger Corporation
USA/07-16/W

