


# T-Bar Guide Systems

- Used to guide counterweight arbors.
- 6" (152 mm) and 8" (203 mm) centers are standard, other centers are available.
- T-Bar systems supplied complete with required T-Bar, steel wall batten angles, stop battens, splice bars, U-clips, adjustable wall knees, bolts, nuts, and washers.
- Adjustable wall knees allow simple, on site adjustment to meet field conditions.
- Vertical T's are pre-punched 1-1/2" x 1-1/2" x 3/16" (38.1 mm x 38.1 mm x 4.76 mm) steel members.
- Horizontal wall battens & stop battens are pre-punched 1-3/4" x 1-3/4" x 3/16" (44.5 mm x 44.5 mm x 4.76 mm) steel angle.
- Optional 2" x 2" (50.8 mm x 50.8 mm) hardwood or hardwood with neoprene bumpers are available for stop battens.



T-Bar Guide System  
012-1500

## Dimensions

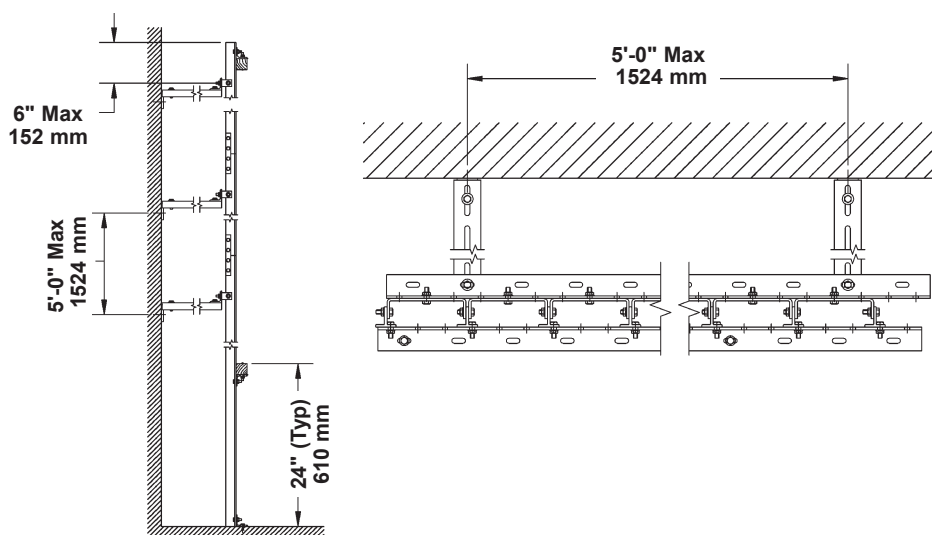

## Order Information

Guide systems are ordered in linear feet of guide required (number of runs of T x height of guide).

Number	Description	Weight
012-1500	T-Bar Guide System	4 lbs./ft. (5.9 kg/m)
112-1H	2" x 2" (50.8 mm x 50.8 mm) Hardwood stop batten	3 lbs./ft. (4.46 kg/m)
112-1N	2" x 2" (50.8 mm x 50.8 mm) Hardwood stop batten with 1/4" (6.35 mm) Neoprene	4 lbs./ft. (5.9 kg/m)



**Design, Manufacture and Installation of Theatrical Equipment Worldwide**

*For unusual applications, J.R. Clancy can create custom equipment to match your facility's specific needs. Please contact us to discuss your project's requirements.*



© 2016 Wenger Corporation  
USA/07-16/W



### WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide 1.507.455.4100 | Fax 507.455.4258 Worldwide 1.507.774.8576  
Parts & Service 800.887.7145 | Canada Office 800.268.0148 | Web wengercorp.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

### GEARBOSS

Phone 800.493.6437 | email gearboss@wengercorp.com | Web gearboss.com | 555 Park Drive, PO Box 448 | Owatonna | MN 55060-0448

### JR CLANCY

Phone 800-836-1885 Worldwide 1.315.451.3440 | Fax 877.836.1885 Worldwide 1.315.451.1766 | Web jrclancy.com  
7041 Interstate Island Road | Syracuse | NY 13209-9713